SIEMENS

Manual

SENTRON

3VA Molded Case Circuit Breakers with UL and IEC Certification

Edition 01/2019

siemens.com/3VA

© 2010 All Rights Reserved

Acer AT2758ML/AT3258ML User Guide
First issue: 07/2010

Acer AT2758ML/AT3258ML
Model number: _____
Serial number: _____
Date of purchase: _____
Place of purchase: _____

HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC.

DVB is a registered trademark of the DVB Project.

Downloaded from www.Manualslib.com manuals search engine

Safety Information and Useful Tips

Safety Information

- Disconnect mains plug when :
  - the red light below the TV screen is flashing continuously.
  - a bright white line is displayed across the screen.
  - cleaning the TV screen. Never use abrasive cleaning agents. Use a slight damp chamois leather or soft cloth.
  - there is a lightning storm.
  - the set is left unattended for a prolonged period of time.
- No naked flame sources, such as lighted candles, should be placed on top of the TV or in the vicinity.
- Do not place your TV set under direct sunlight or heat.
- Leave at least 5 cm around each side of TV set to allow for proper ventilation.
- Avoid placing your set (e.g. near the window) where it is likely to be exposed to rain or water.
- No objects filled with liquids should be placed on top the TV so as to avoid dripping or splashing of liquids on the set.

Useful Tips

- Do not leave your set on standby mode for a prolonged period of time. Switch off set to allow it to be demagnetised. A demagnetised set supports good picture quality.
- Do not shift or move the set around when it is switched on. Uneveness in colour in some parts of the screen may occur.
- Never attempt to repair a defective TV yourself. Always consult a skilled service personnel.

1-4_21PT1323/71/E 3 05/14/03, 5:35 PM

Downloaded from www.Manualslib.com manuals search engine

Adjusting the viewing angle
The viewing angle of the monitor ranges from **-5 – 20°**.

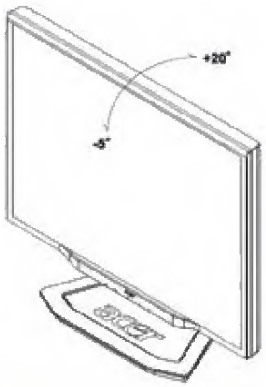

Adjusting the viewing angle (Only AL2223W h/AL2223W r)

Your monitor features a multi-adjustable stand that will enable it move 90mm up/down (height adjustment), 25 degree forward/backward (tilt adjustment), 60 degree side/side (swivel adjustment). To make an adjustment, grasp the monitor with both hands on the right and left edge of the casing and move it to the desired position.

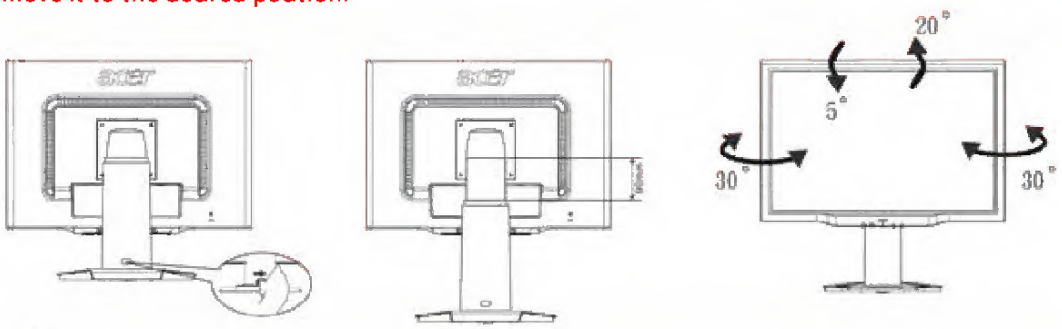

Do not perform a pulling or plugging action when the display is under slanting status to prevent the display from ejecting.

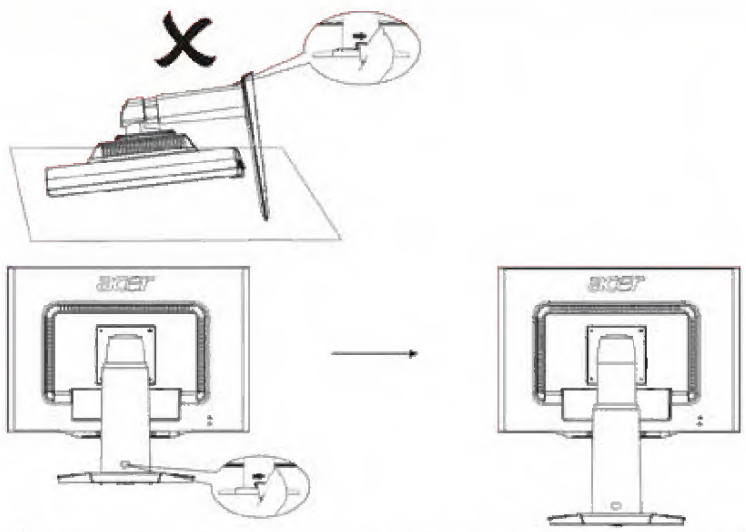

Slide the lock to right from the display support frame as per the figure and then adjust the height. Note that to slide the lock to right, erect the machine on the table to prevent the top part of the display from ejecting.

Downloaded from www.Manualslib.com manuals search engine

4. **Parking Wake**

When Parking Wake is enable the camera will automatically turn on and start recording if an impact to the car is detected such as someone bumping into the car when parked. The G-Sensor should be turned on at the most sensitive setting. Note that this function will only work while the camera is connected to external power.

Operation Guide

1. **Power On/Off**: Long press the power button for around 2~3 seconds to turn on & off. If a MicroSD card is inserted it will start recording automatically when powered on.

2. **Start/Stop recording**: In video mode, short press the OK button to manually stop or start recording.

3. **Photo** : In photo mode, short press the OK button to take a still photo.

4. **Playback**: In playback mode, short press the OK button to play the video.

5. **Power/OK button**: In video mode, photo mode or playback mode, short press the menu button enter the menu, short press up/down to browse and short press the power button to confirm.

6. **Up button**: In the menu press to move up. In standby mode a long press will turn motion detection on/off. In playback mode a short press will rewind.

7. **Down button**: In the menu press to move down.
   In video mode short press to turn audio on/off. (Note: the setting will be saved automatically, no need to set again next time) In playback mode short press to fast forward.

2. SPECIFICATIONS

			AR-147	AR-247	AR-447
General	Frequency range (MHz)		144 to148(USA)	222 to 225(USA)	430 to 440
			144 to146	230 to 250	
				250 to 270	
	Mode		F3E(FM)		
	Antenna impedance		50Ω		
	Operating temperature		-20˚C to +60˚C (-4 F to +140˚F)		
	Power requirements		13.8V DC ±15%(11.7~15.8V)		
	Ground		Negative		
	Current drain	Transmit mode	Less than 12A	Less than 9A	Less than10A
		Receive mode	Less than 0.6A		
	Frequency Stability		Less than ±5ppm		
	Dimensions (WxHxD) (mm)(Projections included)		140x40x166(5-1/2" x 1-37/64" x 6-17/32")		
	Weight (kg)		1.2(2.65lbs)		
Transmitter	Output power	HI	Approx 60W	Approx 30W	Approx 35W
		MID	Approx 25W	Approx 15W	Approx 15W
		LOW	Approx 7W	Approx 7W	Approx 7W
	Modulation		Reactance modulation		
	Spurious radiation		Less than -80dB	Less than -70dB	Less than -65dB
	Maximum frequency deviation		±5kHz		
	Audio distortion(at 60% modulation)		Less than 3%(300 to 3000 Hz)		
	Microphone impedance		2.2kΩ		
Receiver	Circuitry		Dual conversion superheterodyne		
	Intermediate frequency	1st / 2nd	10.7MHz/455kHz	30.85MHz/455kHz	30.85MHz/455kHz
	Sensitivity (12dB SINAD)		Less than 0.18 uV		
	Selectivity		70 dB	70 dB	65 dB
	Squelch sensitivity		Less than 0.1 uV	Less than 0.177 uV	Less than 0.177 uV
	Audio output(10% distortion)		More than 2W across 8Ω load		
	External speaker impedance		8Ω		

Note:1.Circuit and ratings are subject to change without prior notice due to advancement in technology.

2.Recommended duty cycle: 1 minute:Transmit, 3minutes Reception.

Downloaded from www.Manualslib.com manuals search engine

Left view

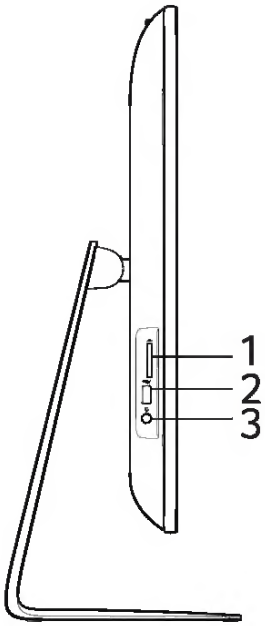

#	Icon	Item	Description
1		SD™ card reader	Accepts Secure Digital (SD™) cards. ***Note:*** *The card reader uses one card at a time.*
2	USB	USB 3.0 port with power-on/standby charging	Connect to USB devices.
3		Headset/speaker jack	Connects to audio devices (e.g., speakers, headphones), or a headset with microphone.

Downloaded from www.Manualslib.com manuals search engine

Sealed Surface Burners

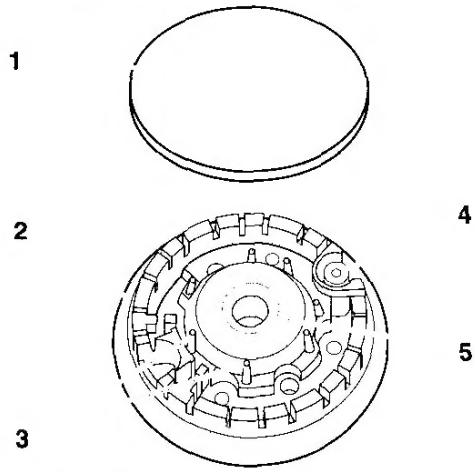

1. Burner cap
2. Burner base
3. Alignment pins
4. Ignitor
5. Gas tube opening

IMPORTANT: Do not obstruct the flow of combustion and ventilation air around the burner grate edges.

Burner cap: Always keep the burner cap in place when using a surface burner. A clean burner cap will help prevent poor ignition and uneven flames. Always clean the burner cap after a spill-over and routinely remove and clean the caps according to the "General Cleaning" section.

Gas tube opening: Gas must flow freely throughout the gas tube opening for the burner to light properly. **Keep this area free of soil and do not allow spills, food, cleaning agents or any other material to enter the gas tube opening.** Protect it from spill-overs by always using a burner cap.



1. 1-1½" (25-38 mm)
2. Burner ports

Burner ports: Check burner flames occasionally for proper size and shape as shown below. A good flame is blue in color, not yellow. Keep this area free of soil and do not allow spills, food, cleaning agents or any other material to enter the burner ports.

To Clean:

IMPORTANT: Before cleaning, make sure all controls are off and the oven and cooktop are cool. Do not use oven cleaners, bleach or rust removers.

1. Remove the burner cap from the burner base and clean according to the "General Cleaning" section.
2. Clean the gas tube opening with a damp cloth.
3. Clean clogged burner ports with a straight pin as shown. Do not enlarge or distort the port. Do not use a wooden toothpick. If the burner needs to be adjusted, contact a trained repair specialist.



4. Replace the burner cap, making sure the alignment pins on the cap are properly aligned with the burner base.

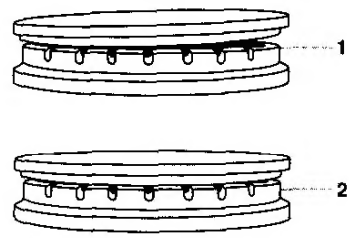

1. Incorrect
2. Correct

5. Turn on the burner. If the burner does not light, check cap alignment. If the burner still does not light, do not service the sealed burner yourself, contact a trained repair specialist.

Downloaded from www.Manualslib.com manuals search engine

European Guarantee

If you should move to another country within Europe then your guarantee moves with you to your new home subject to the following qualifications:
The guarantee starts from the date you first purchased your product.
The guarantee is for the same period and to the same extent for labour and parts as exists in the new country of use for this brand or range of products.
This guarantee relates to you and cannot be transferred to another user.
Your new home is within the European Community (EC) or European Free Trade Area.
The product is installed and used in accordance with our instructions and is only used domestically, i.e. a normal household.
The product is installed taking into account regulations in your new country.
Before you move please contact your nearest Customer Care centre, listed below, to give them details of your new home. They will then ensure that the local Service Organisation is aware of your move and able to look after you and your appliances.

France Senlis	+33 (0)3 44 62 20 13
Germany N.rnberg	+49 (0)800 234 7378
ItalyPordenone	+39 (0) 800 117511
Sweden Stockholm	+46 (0)20 78 77 50
UKSlough	+44 (0) 1753 219898

Technical data

Model		1400 D
Size	Height	16,3 cm
	Width	59,9 cm
	Depth	53,5 cm
Light		Max 2x7 W
Grease filter		2 st.
Voltage		230 V
Total power		210 W

Downloaded from www.Manualslib.com manuals search engine

1. Place the packed food in the drawers. Place food to be frozen in the upper drawer. Unfrozen food must not touch items already frozen, otherwise the frozen food could begin to defrost.
2. When freezing fresh food, depress the ambient temperature switch (A) 12 hours before loading the food without modifying the thermostat setting. The pilot light will come on. At the end of the freezing process, do not forget to depress again the ambient switch in order to avoid an increase of the power consumption.
3. Place frozen foods in the drawers sorted by type, as far as possible.
4. If large quantities of food are to be stored, remove all drawers and baskets from appliance and place food on cooling shelves. Pay careful attention not to exceed load limit ▼ stated on the side of the upper section

Ice pack

There are two ice packs in one drawer of the freezer.

In the event of a power failure or malfunction, the ice pack will lengthen the amount of time it takes for the frozen food to become too warm by several hours. The ice pack can only fulfil this task efficiently if it is placed in the uppermost drawer, at the front, above the frozen food. You can use the ice pack for cooling cold bags.

Preparation of Ice Cubes

1. Fill the ice cube tray 3/4 full with cold water, place it in the freezer compartment and leave to freeze.
2. To loosen the frozen cubes, either twist the ice cube tray or hold it under running water for a few seconds.

   Important! Never try to free an ice tray that is frozen to the freezer compartment using pointed or sharp edged objects. Use the ice scraper supplied.

Positioning

This appliance should only be installed at a location where the ambient temperature corresponds to the climate classification indicated on the rating plate, which is located on the inside left of the appliance.

The following table shows which ambient temperature is correct for each climate classification.

Climate classification	for an ambient temperature of
SN	+10 to +32 °C
N	+16 to +32 °C

The appliance should be located in a dry atmosphere, out of direct sunlight and away from continuous heat and extreme temperature, e.g. not next to a boiler or radiator, or in a very cold room e.g. an outhouse. If these temperatures are exceeded i.e. warmer or colder, then the appliance may not operate correctly.

For building-in and door reversal instructions please refer to the relevant instructions on the following pages.

Your appliance needs air

For safety reasons, minimum ventilation must be as shown Fig.

Attention: keep ventilation openings clear of obstruction;



Reversing the door

⚠ The side the door opens can be changed from the right side (factory adjustment) to the left side, if the installation site requires.

Warning! When changing the side the door opens, the appliance must not be connected to the mains. Remove plug from the mains beforehand.

Downloaded from www.Manualslib.com manuals search engine

Welcome

Congratulations on purchasing your new Aspire computer! You now have the convenience and flexibility of a full-featured multimedia PC, offering increased productivity combined with first-class digital entertainment.

Incorporating the latest Microsoft® Windows® XP operating system, your Aspire offers a host of functions designed to improve your computing experience.

Major benefits

Your new Aspire computer enables you to do the following:

- Use the latest Acer entertainment software to watch movies, share photos and listen to your favorite song.
- Maximize your use of the Internet by downloading and playing exciting new multimedia files.
- Enjoy your audio CDs, even when you are not using your computer for other tasks.
- Delight in using a stylish new PC that offers convenient connections for the latest peripherals.

Downloaded from www.Manualslib.com manuals search engine

■ User guidance

For each of my cooking zones there are five symbols with control lights that show at what setting the various cooking processes can be done.

The symbols signify:

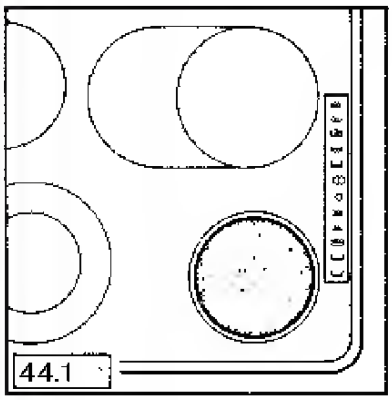

Heating up, frying at high temperature

Frying

Steaming/Boiling

Parboiling

Melting

Please also follow the table on setting the automatic cooking zones.

■ Residual heat indicator

For each of my glass-ceramic cooking zones there is a control light, on the left or the right in the glass-ceramic hob, which lights up if the cooking zone is hot. As soon as the cooking zone cools down the light goes out.

■ Escape of steam and fumes from the oven

The fumes from my oven can escape through the openings at the back of my hob. You will find more details in the section on fume outlet from the oven.

KAG1-4 7/91 GB/EU

Downloaded from www.Manualslib.com manuals search engine

Wireless operation channels for different domains

N. America	2.412-2.462 GHz	Ch01 through Ch11
Japan	2.412-2.484 GHz	Ch01 through Ch14
Europe ETSI	2.412-2.472 GHz	Ch01 through Ch13

Downloaded from www.Manualslib.com manuals search engine

(GB)	**IDENTITY CARD**	This card refers to the guarantee which applies to this equipment. For further information consult your dealer.
(D)	**GERÄTE-KENNKARTE**	Diese Karte wird für die Garantie dieses Gerätes benötigt. Wenden Sie sich hierfür an Ihren Händler.
(F)	**CARTE D'IDENTIFICATION**	Cette carte est nécessaire pour faire éventuellement valoir nos droits à la garantie sur cet appareil. Consultez notre revendeur à ce sujet.
(NL)	**IDENTIFICATIEKAART**	Deze kaart refereert aan de garantie geldig voor dit apparaat. Raadpleeg hiervoor uw handelaar.
(I)	**CARTA D'IDENTIFICAZIONE**	Questa carta si riferisce alla garanzia di apparecchio, su quello apparecchio. Consultate il vostro rivenditore in merito.
(E)	**TARJETA DE IDENTIFICACION**	Dicha tarjeta hace referencia a la garantía que rige para este aparato. A este fin consulte a su distribuidor.
(DK)	**ID KORT**	Dette kort refererer til den garanti som omhandler dette udstyr. Opsøg om nød forhandler for yderligere informationer.
(N)	**IDENTIFIKASJONSKORT**	Dette kort refererer til garantisystemet for dette apparat. Forhandleren kan gi Dem ytterligere informasjon.
(S)	**IDENTIFIERINGSKORT**	Detta kort hänvisar till den garanti som gäller för denna apparat. Kontakta Din handlare för ytterligare information.
(SF)	**TUNNISTUSKORTTI**	Tämä kortti liittyy laitteen takuuseen. Tarkemmat tiedot saat jälleenmyyjältä.
(P)	**CARTÃO DE IDENTIFICAÇÃO**	Este cartão refere-se à garantia válida para este equipamento. Consulte o seu fornecedor para mais informações.

PHILIPS

Printed in Italy by G.S.F. - 641

3122 125 90061

Downloaded from www.Manualslib.com manuals search engine

PCB CONDUCTOR VIEW

MAIN BOARD

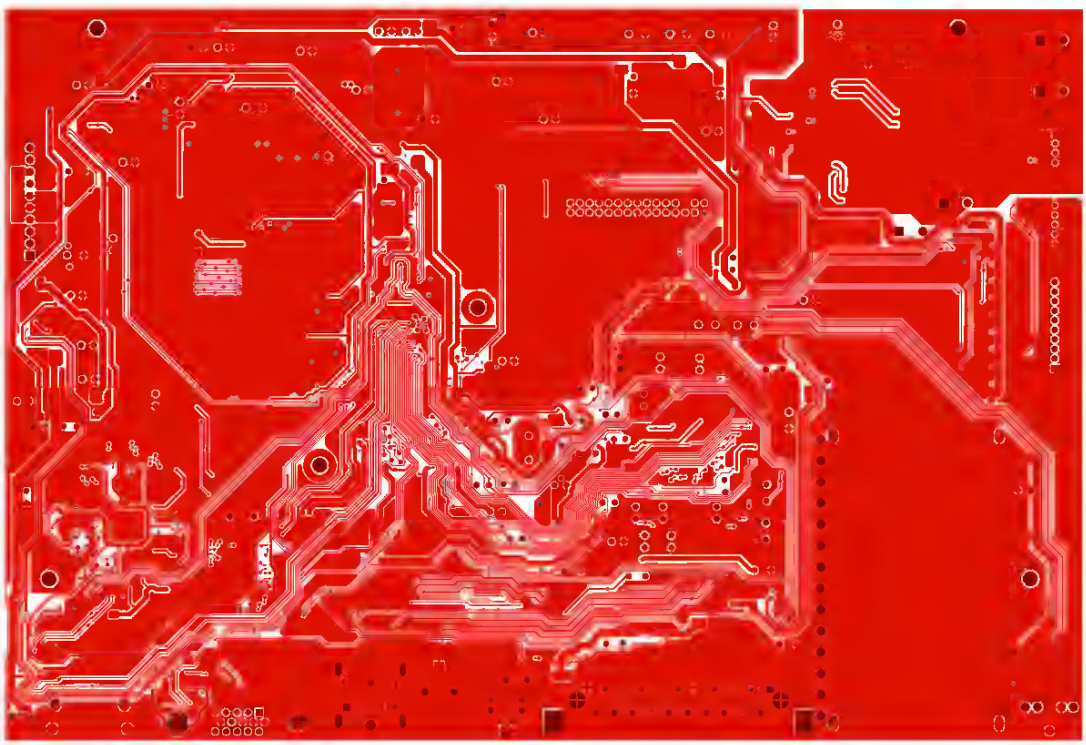

Downloaded from www.Manualslib.com manuals search engine

5.2 Use TV menus

On-screen menus help you install your TV, adjust picture and sound settings and access other features This section describes how to navigate the menus.

Access the main menu

1. Press **MENU** on the remote control to display the main menu.

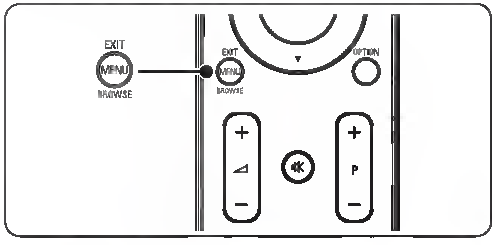

The following menu appears

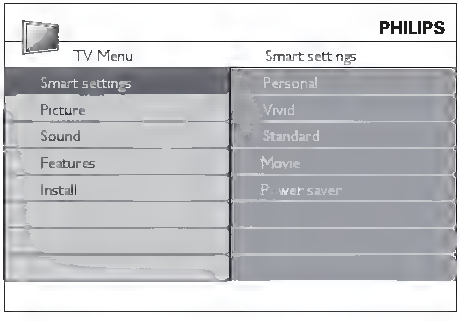

2. Press ▲ or ▼ to move the cursor to the following items
   - **Smart settings**
   - **Picture**
   - **Sound**
   - **Feature**
   - **Install**
3. Press ▶ or **OK** to select an item.
4. Press **MENU** to exit.

Use the main menu

The following steps of adjusting brightness is one example to show how to use the main menu.

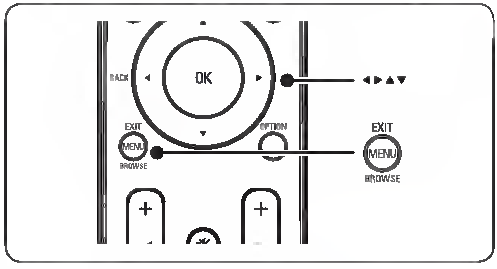

1. Press **MENU** on the remote control to display the TV menu.

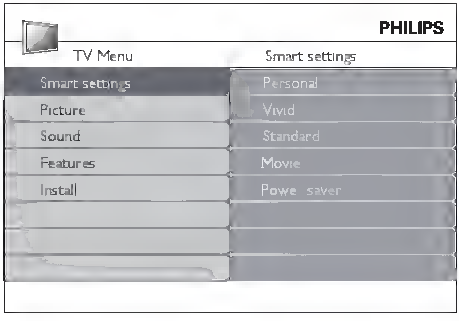

2. Press ▼ to select **Picture**.

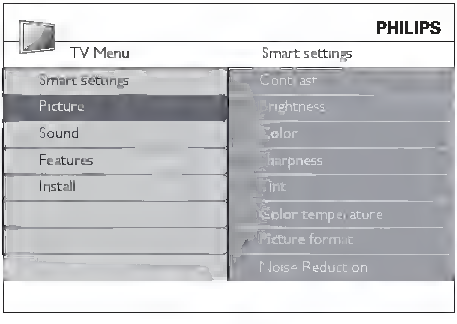

Fiorenzato

Notification of CEE conformity

The Fiorenzato M.C S.r.l society, Via Niedda 12/b - 35010 Peraga di Vigonza (PD) Italia, declares that coffee grinder-dosers and coffee grinders comply to the essential requirements of the following directives:
Low voltage directive 2006/95/EC
Machine directive 2006/42/EC
EMC directive 2004/108/EC

Those coffee grinder dosers has been tested applying the norms EN60335-1 (safety of instruments voters to use domestic and similar) and EN60335-2-64 (2nd Part: Particular norm for kitchen instruments and collective use).

Fiorenzato M.C.
uff. Tecnico



Downloaded from www.Manualslib.com manuals search engine

Roasting

Roasting dishes

- Use heat-resistant ovenware to roast (please read the instructions of the manufacturer).
- Large roasting joints can be roasted directly in the deep pan (if present) or on the wire shelf above the deep pan.
- Roast lean meats in a roasting tin with a lid. This will keep the meat more succulent.
- All types of meat, that can be browned or have crackling, can be roasted in the roasting tin without the lid.

Roasting with Turbo Grilling

Beef

Type of meat	Quantity	Oven function	Shelf position	Temperature °C	Time min.
Pot roast	1-1.5 kg	Conventional Cooking	1	230	120 - 150
Roast beef or fillet rare	per cm of thickness	Turbo Grilling	1	190 - 200 [1)]	5 - 6
Roast beef or fillet medium	per cm of thickness	Turbo Grilling	1	180 - 190 [1)]	6 - 8
Roast beef or fillet well done	per cm of thickness	Turbo Grilling	1	170 - 180 [1)]	8 - 10

1) Pre-heat the oven

Pork

Type of meat	Quantity	Oven function	Shelf position	Temperature °C	Time min.
Shoulder, neck, ham joint	1-1.5 kg	Turbo Grilling	1	160 - 180	90 - 120
Chop, spare rib	1-1.5 kg	Turbo Grilling	1	170 - 180	60 - 90
Meat loaf	750 g-1 kg	Turbo Grilling	1	160 - 170	50 - 60
Porkknuckle (pre-cooked)	750 g-1 kg	Turbo Grilling	1	150 - 170	90 - 120

Veal

Type of meat	Quantity	Oven function	Shelf position	Temperature °C	Time min.
Roast veal	1 kg	Turbo Grilling	1	160 - 180	90 - 120
Knuckle of veal	1.5-2 kg	Turbo Grilling	1	160 - 180	120 - 150

Downloaded from www.Manualslib.com manuals search engine

CONFIDENTIAL

9-4 Narrow 19″ Part Schematic Diagram

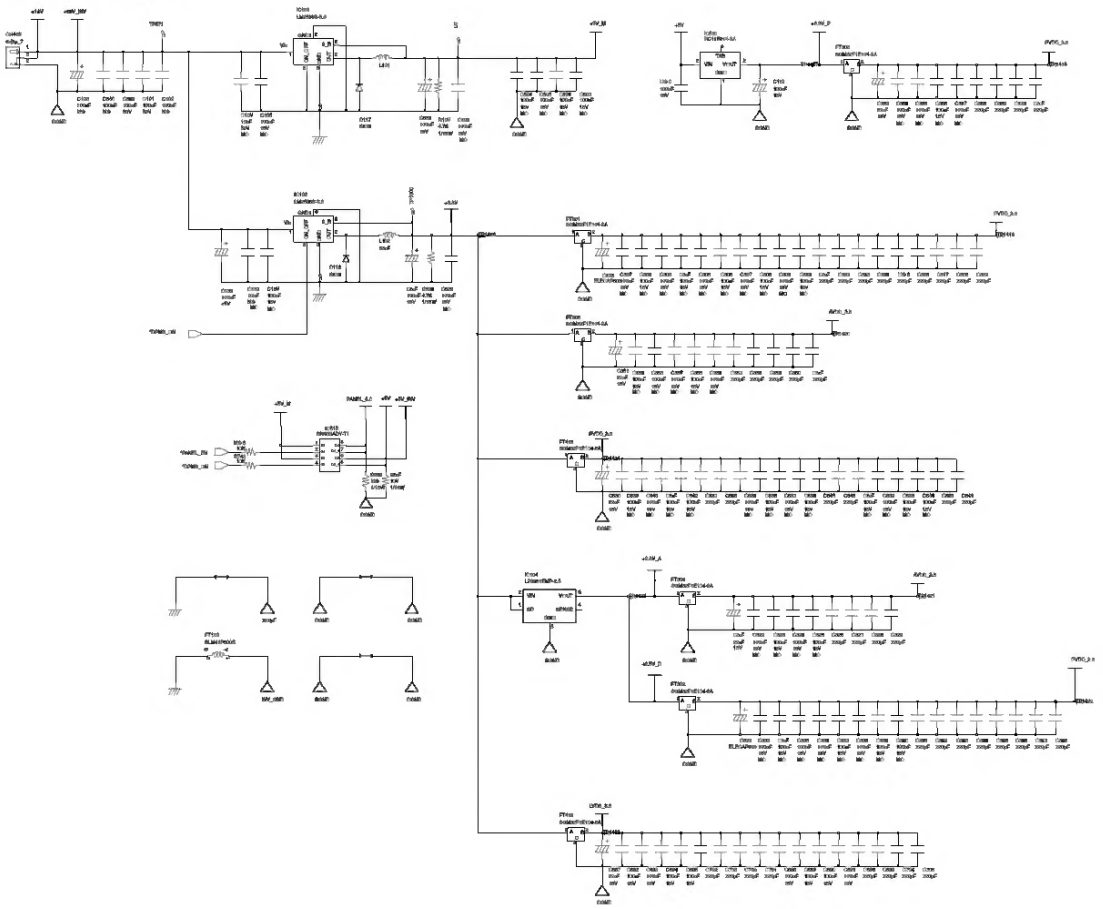

Downloaded from www.Manualslib.com manuals search engine

Specifications are subject to change without notice.
"PHILIPS and the PHILIPS' Shield Emblem are registered trademarks of Koninklijke Philips Electronics N.V. And are used under license from Koninklijke Philips Electronics N.V."

www.philips.com

Downloaded from www.Manualslib.com manuals search engine

The Alarm Setup Window

Problems detected by the VLD-1002-MD card are transmitted as alarms to the card's LED, to the Dashboard interface, and to the optional SNMP monitoring. The problems detected can be reported to the user as minor alarms or critical alarms.

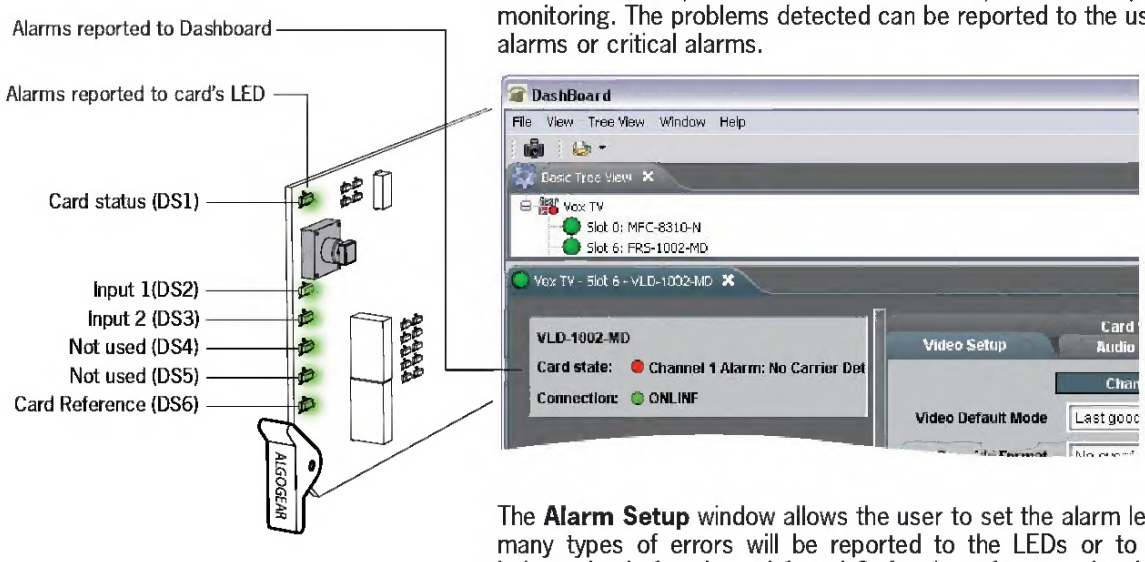

The **Alarm Setup** window allows the user to set the alarm level at which many types of errors will be reported to the LEDs or to Dashboard, independently for channel 1 and 2, for the reference signal and for the license key detection. The alarm signals can also be disabled.

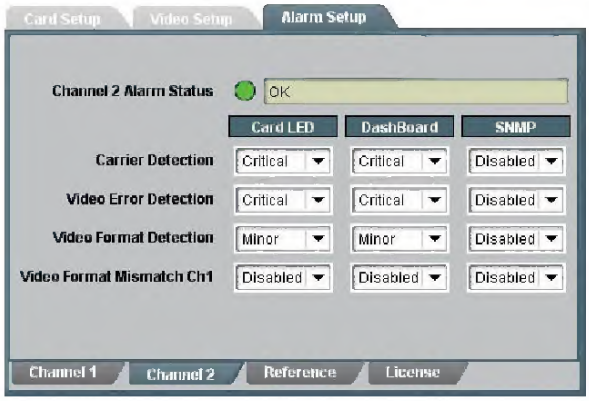

Minor: When the alarm level for a specific type or error is set to minor, the card's LED will report the problem with a yellow light and Dashboard with a yellow circle next to an error message describing the problem.

Critical: When the alarm level for a specific type or error is set to critical, the card's LED will report the problem with a red light and Dashboard with a red circle next to an error message describing the problem.

Carrier and video detection errors on input 1 are always reported as critical and cannot be set otherwise.

The **Alarm Setup** settings are automatically saved to memory and are recalled after a power-up.

Downloaded from www.Manualslib.com manuals search engine

3. When the following dialog box appears, leave the Password field blank (first login) and click Login to enter the main configuration window.

Note: To set a password, refer to the **Administrator Settings** in Advanced Setup.

4. It is recommended that beginners use the **Quick Setup** option. It will lead you step by step to configure the Wireless Router.

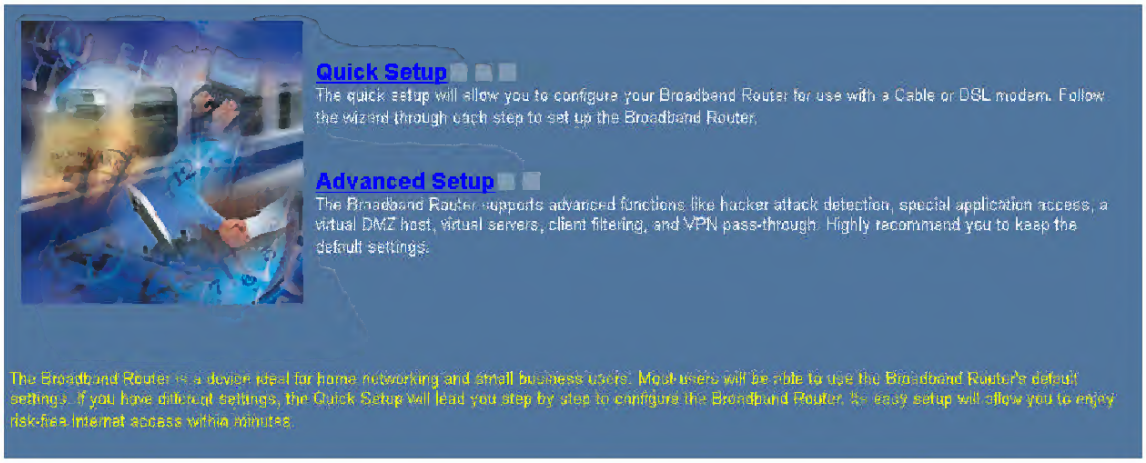
Quick Setup
The quick setup will allow you to configure your Broadband Router for use with a Cable or DSL modem. Follow the wizard through each step to set up the Broadband Router.
Advanced Setup
The Broadband Router supports advanced functions like hacker attack detection, special application access, a virtual DMZ host, virtual servers, client filtering, and VPN pass-through. Highly recommend you to keep the default settings.
The Broadband Router is a device ideal for home networking and small business users. Most users will be able to use the Broadband Router's default settings. If you have different settings, the Quick Setup will lead you step by step to configure the Broadband Router. The easy setup will allow you to enjoy risk-free Internet access within minutes.

Quick Setup

In the main web page, select **Quick Setup** to specify the **Time Zone**, **Wireless Settings**, and **WAN connection type**.

Downloaded from www.Manualslib.com manuals search engine